





1. PHYSICAL CHARACTERISTICS (mm)

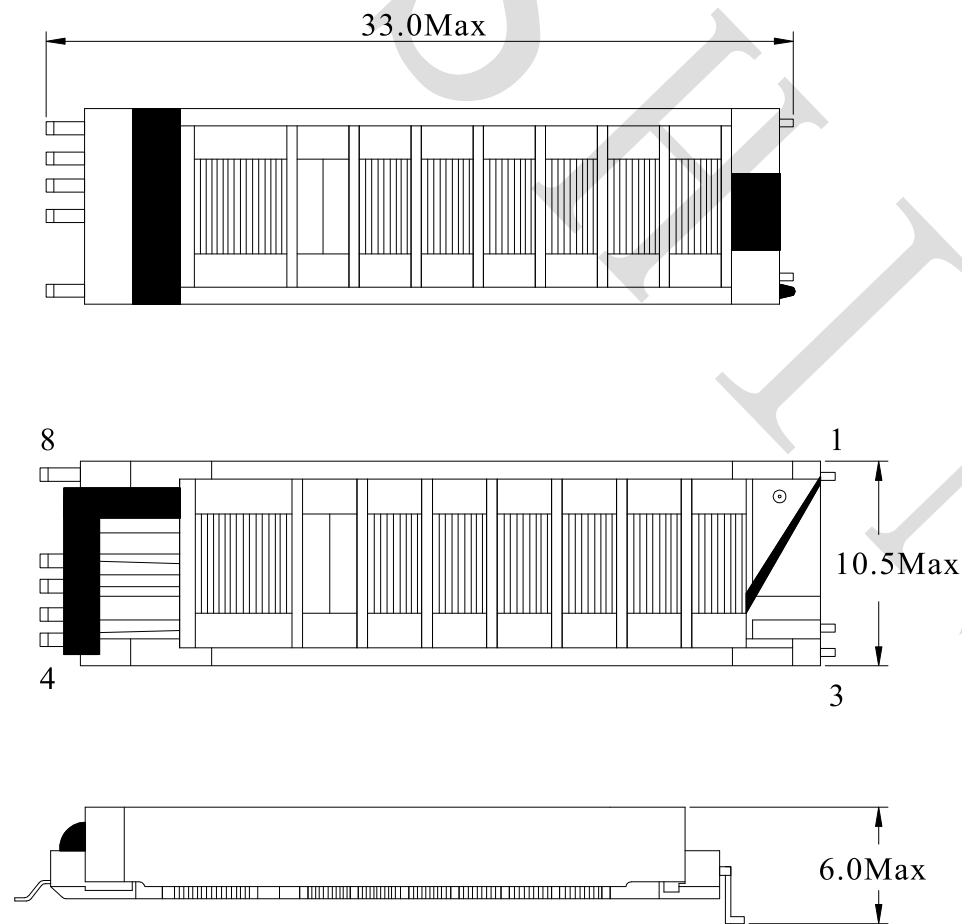

2. ELECTRONICAL SCHEMATIC

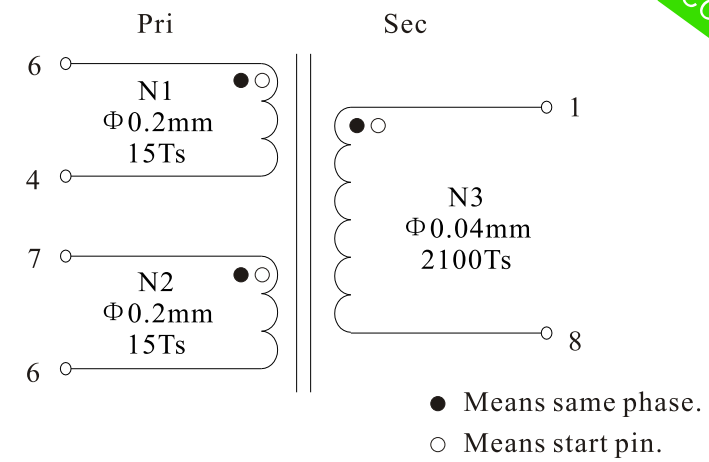

3. ELECTRONICAL SPECIFICATIONS

- Inductance: Pin1-8: 0.68H Min@1KHz,1V
- Pin6-4: 32.8uH Min@1KHz,1V
- Pin7-6: 32.8uH Min@1KHz,1V
- Lk: Pin1-8: 0.23mH ± 15% @ 40KHz,1V
- Pin6-4: 11uH ± 15% @ 40KHz,1V
- Pin7-6: 11uH ± 15% @ 40KHz,1V
- DCR: Pin1-8: 0.67K Ω Max
- Pin6-4: 0.2 Ω Max
- Pin7-6: 0.19 Ω Max
- Hi-Pot: Pri-Sec: 3.0K Vac,5mA,2S
- Pri-Core: 1.0K Vac,5mA,2S
- Sec-Core: 3.0K Vac,5mA,2S

NOTES:
Temp 25°C 48%RH
RoHS Compliant

NAME:	Transformer		
CUSTOMER P/N:	FT-BIT0908A	DATE:	2012-05-29
SHINHOM P/N:	HTUI98-032	REV: A0	PAGE
DRAWN BY	CHECKED BY	APPROVE BY	